

TM12K USER MANUAL

Compact and Intelligent Sharp Light

- Max Output of 12,000 Lumens
- Customizable HIGH Brightness Level
- Multi-functional OLED Display



Features

- Utilizes 6 x CREE XHP50 LEDs to produce a max output of 12,000 lumens
- Maximum brightness of 15,600cd and maximum throw of 250 meters
- Lightweight, rigid and fast cooling tube built from unibody die-Cast CNC technology
- Multifunctional OLED real-time display for brightness, battery voltage, runtime and temperature etc.
- Built-in 4,800mAh 21700 rechargeable Li-ion battery
- Intelligent Li-ion battery charging circuit
- High efficiency constant circuit provides stable output up to 200 hours
- Combination of dual side buttons and a tail switch controls 5 brightness levels
- Customizable HIGH Brightness Level
- An optical system combined with crystal coating and "Precision Digital Optic Technology" (PDOT) Optic lenses with double-sided scratch resistant coating
- Constructed from aero grade aluminum alloy
- HA III military grade hard-anodized finish
- Waterproof in accordance with IP68 (2 meters submersible)
- Impact resistant to 1 meter
- Tail stand capability

Specifications

Dimensions: 108mm x 41mm x 31mm (4.25" x 1.61" x 1.22") (Clip Included)
Weight: 233g (8.22oz) (Clip Included)

Accessories


USB-C Charging Cable, Holster, Lanyard

Technical Data

	TURBO	HIGH	MID	LOW	ULTRALOW
Brightness	12,000 Lumens	1,000 Lumens	300 Lumens	100 Lumens	6 Lumens
Runtime	—	*2h 15min	7h 30min	20h	200h
Beam Distance	250m	71m	35m	21m	5m
Peak Beam Intensity	15,600cd	1,280cd	330cd	118cd	7cd
Impact Resistance	1m (Impact Resistance)				
Water Resistance	IP68, 2m (Waterproof and Submersible)				

WARNINGS
1. The TURBO Brightness Level of 12,000 lumens will produce massive heat rapidly during long-term activation. To avoid overheating and prevent accidental damage, DO NOT activate TURBO repeatedly if the light becomes too hot to handle.
2. DO NOT cover the head of the flashlight or put it close to other objects when turned on to avoid accidents.
3. DO NOT submerge the flashlight into any liquid when it is hot. Doing so may cause irreparable damage to the light due to the difference of air pressure inside and outside of the tube.
4. CAUTION! Possible dangerous radiation! Don't look into the light! May be dangerous for your eyes.

Charging

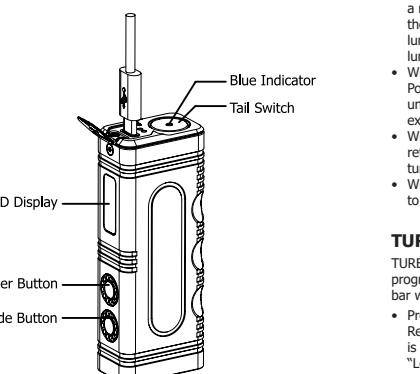

Warranty Service

All NITECORE® products are warranted for quality. Any DOA / defective product can be exchanged for a replacement through a local distributor/dealer within 15 days of purchase. After that, all defective / malfunctioning NITECORE® products can be repaired free of charge within 24 months from the date of purchase. Beyond 24 months, a limited warranty applies, covering the cost of labor and maintenance, but not the cost of accessories or replacement parts.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

For the latest information on NITECORE® products and services, please contact a local NITECORE® distributor or send an email to service@nitecore.com

** All images, texts and statements are specified herein for reference purposes only. Should any discrepancy occur between this manual and information specified on www.nitecore.com, NITECORE® Innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

The product(s) is/are subject to:

1. the product(s) is/are broken down, reconstructed and/ or modified by unauthorized parties;

2. the product(s) is/are damaged due to improper use.

